CU04 Series Mini USB 5 Circuits Receptacle SMT Type Connectors

- High temperature plastic for Insulator
- With fixed tabs and ground pegs
- Grounding fingers provide locking feature and plug retention
- USB 2.0 Approved Test ID: Mini AB:60000948/Mini B:60000946
- Lead Free soldering process available

RoHS Compliant

P/N	CU04S*M*5*0-*0

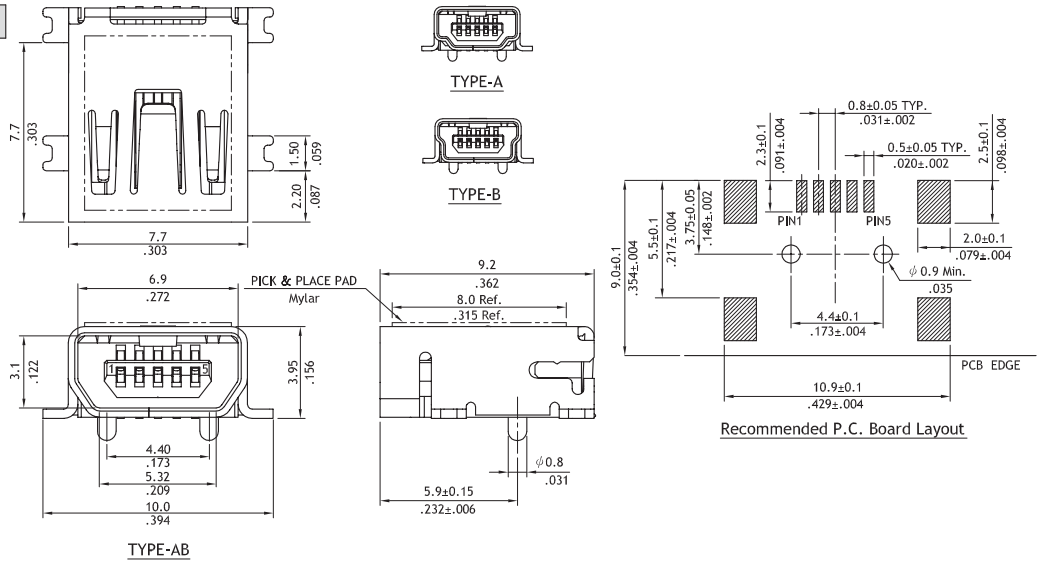

P/N	CU04S*M*5*H-*0

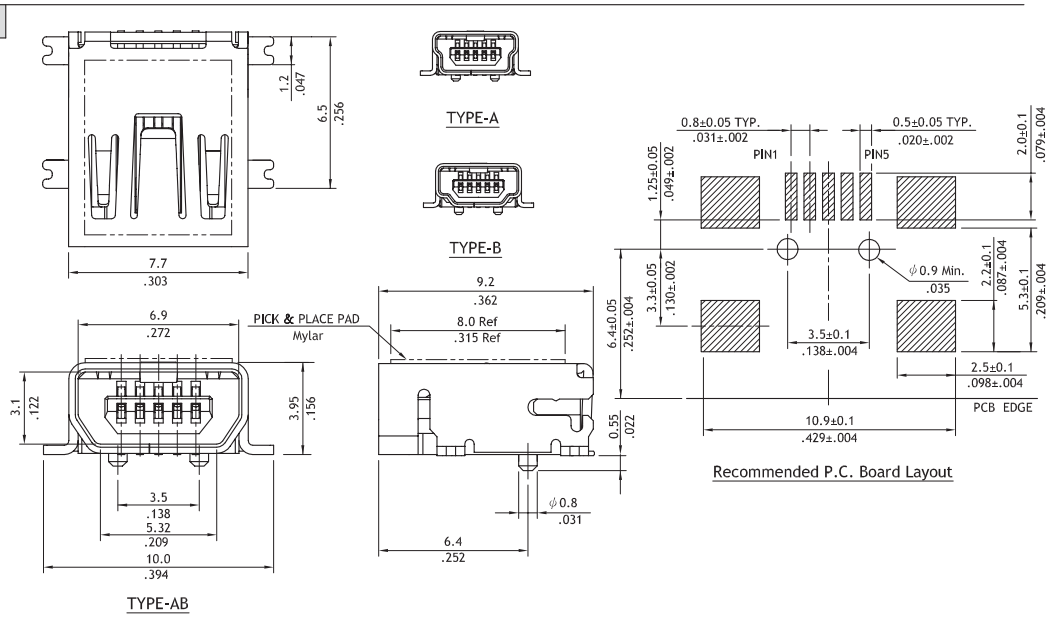

Ordering Code

❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽ ❾ ❿

CU04 S C M 1 5 B 0 - R0 - LF

❶ Series No.
❷ S= Socket
❸ Plating code:
C= Selective 30μin Gold over 50μin Nickel
*Optional plating available but MOQ requested
❹ Tail style: M = SMT Type
❺ Insulator color:0= White , 1= Black , 9= Gray
❻ No.of Circuits: 5 Pin
❼ Type: A= A Type(White), B= B Type(Black), C= AB Type(Gray)
❽ Options: 0= Standard , H= HRS Type
❾ Packing Option:
R0= Tape & Reel (With Pick & Place Pad)
T0= Tube
Process:
LF= For Lead Free soldering process
*Empty code 10, if using Tin-Lead soldering process